


Annex A – Item Specification for RFQ protective transparent sneeze guard on the desktop, protection against viruses

LOT 1. Protective transparent sneeze guard on the desktop

LOT 1.1. Protective transparent sneeze guard (Desktop #1)

Norms and specifications	Essential minimum value
Desktop configuration	Right angle, the need for two sneeze guards
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of the sheeting #1	Width 1660 mm Height 800 mm
The dimensions of the sheeting #2	Width 600 mm Height 800 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed
The dimensions of racks for protective sneeze guards	Height 900 mm Width, at least 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	3 pcs (if one rack unites 2 sheeting at right angles) OR 4 pcs (if the two sheeting are joined separately)
Horizontal lower rack (<i>optional</i>)	Length 1630 mm Length 600 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	City of Sumy (address delivery)

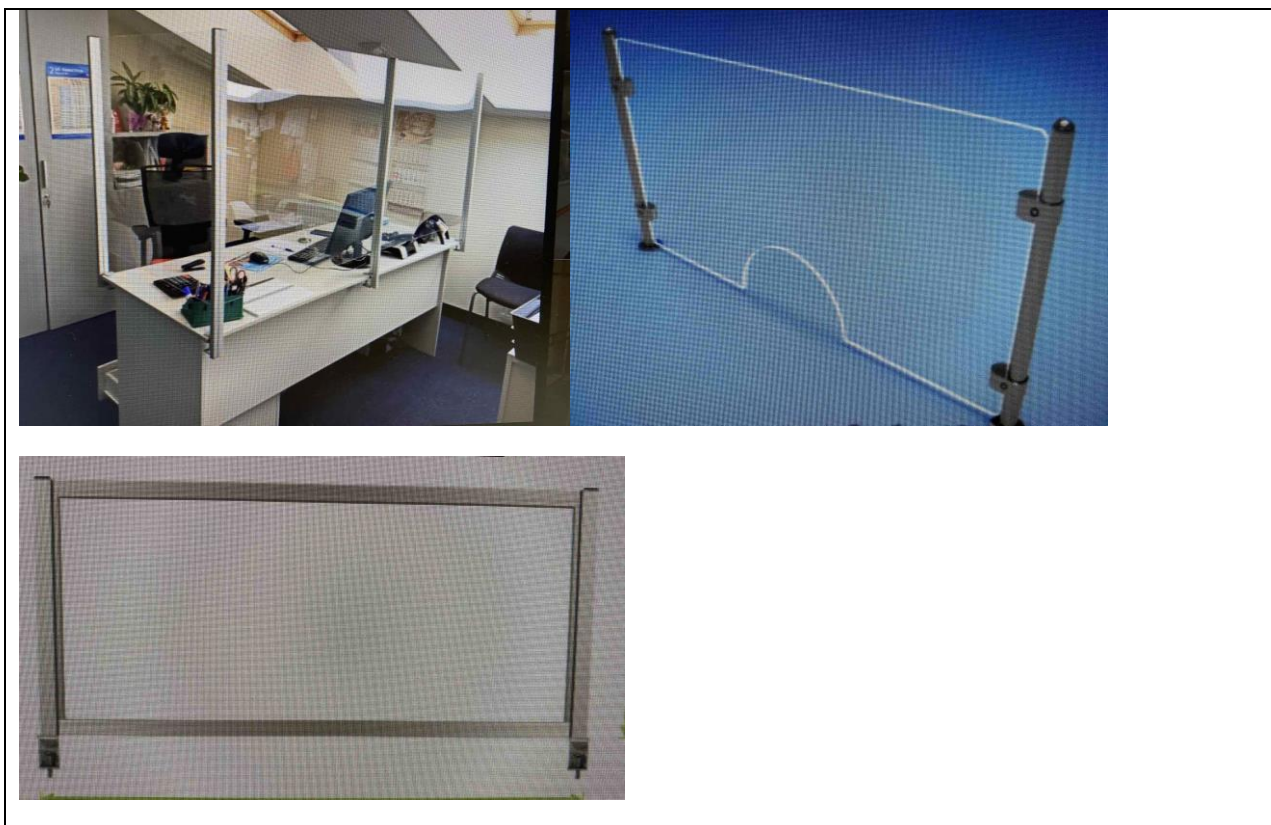

LOT 1.2. Protective transparent sneeze guard (Desktop #2)

Norms and specifications	Essential minimum value
Desktop configuration	Desktop with a rounded corner. At the corner is an additional rack for connection
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of the sheeting #1	Width 1400 mm Height 800 mm
The dimensions of the sheeting #2	Width 150 mm Height 800 mm
The dimensions of the sheeting #3	Width 150 mm Height 800 mm
The dimensions of the sheeting #4	Width 400 mm Height 800 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed
The dimensions of racks for protective sneeze guards	Height 900 mm Width, at least 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with


	caps from above
Vertical racks with clamps	Minimum 6 pcs
Horizontal lower rack (<i>optional</i>)	Length 1400 mm Length 150 mm Length 150 mm Length 400 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	City of Sumy (address delivery)



LOT 1.3. Protective transparent sneeze guard (Desktop #3)

Norms and specifications	Essential minimum value
Desktop configuration	L-shaped
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of the sheeting #1	Width 1300 mm


	Height 800 mm
The dimensions of the sheeting #2	Width 1160 mm Height 800 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed
The dimensions of racks for protective sneeze guards	Height 900 mm Width, at least 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	5 pcs (if one rack unites 2 sheeting at right angles) 6 pcs (if the two sheeting are joined separately)
Horizontal lower rack (<i>optional</i>)	Length 1300 mm Length 1160 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	City of Uzhgorod (address delivery)

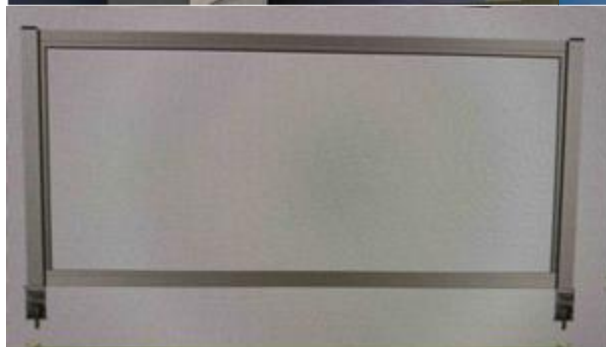

LOT 1.4. Protective transparent sneeze guard (Desktop #4)

Norms and specifications	Essential minimum value
Desktop configuration	Standard
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of the sheeting #1	Width 1150mm Height 800 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed
The dimensions of racks for protective sneeze guards	Height 900 mm Width, at least 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	2 pcs
Horizontal lower rack (optional)	Length 1150 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	City of Uzhgorod (address delivery)



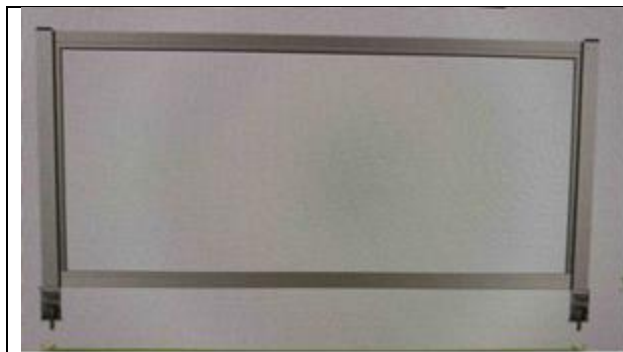


LOT 1.5. Protective transparent sneeze guard (Desktop #5)

Norms and specifications	Essential minimum value
Desktop configuration	Standard
Protective transparent sneeze guards	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guards	At least 4 mm
Colour	Transparent
The dimensions of the sheeting #1	Width 1000 mm Height 800 mm
The dimensions of the sheeting #2	Width 650 mm Height 800 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed
The dimensions of racks for protective sneeze guards	Height 900 mm Width, at least 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	5 pcs (if one rack unites 2 sheeting at right angles) OR 6 pcs (if the two sheeting are jointed separately)
Horizontal lower rack (optional)	Length 1000 mm Length 800 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	City of Lutsk (address delivery)



LOT 1.6. Protective transparent sneeze guard (Desktop #6)


Norms and specifications	Essential minimum value
Desktop configuration	Standard
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of the sheeting #1	Width 1100 mm Height 800 mm
The dimensions of the sheeting #2	Width 1400 mm Height 800 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed
The dimensions of racks for protective sneeze guards	Height 900 mm Width at least 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	4 pcs (if one rack unites 2 sheeting at right angles) OR 5 pcs (if the two sheeting are joined separately)
Horizontal lower rack (optional)	Length 1100 mm Length 1400 mm

Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Lutsk (address delivery)
	

LOT 1.7. Protective transparent sneeze guard (Desktop #7)

Norms and specifications	Essential minimum value
Desktop configuration	Corner table
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of sheeting #1	Width 1240 mm Height 800 mm
The dimensions of sheeting #2	Width 1330 mm Height 800 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed

The dimensions of racks for protective sneeze guards	Height 900 mm Width, at least 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	4 pcs (if one rack unites 2 sheeting at right angle) OR 5 pcs (if the two sheeting are joined separately)
Horizontal lower rack (optional)	Length 1100 mm Length 1330 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Lviv (address delivery)

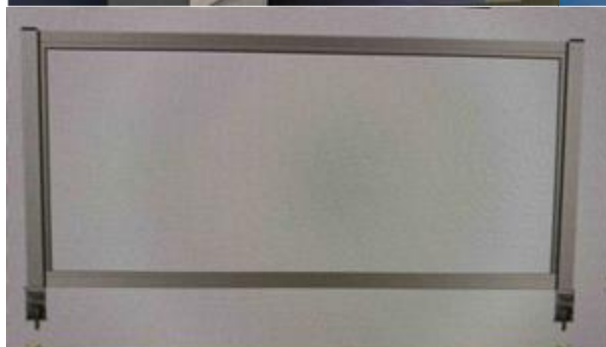

LOT 1.8. Protective transparent sneeze guard (Desktop #8)

Norms and specifications	Essential minimum value
Desktop configuration	Standard
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of the sheeting #1	Width 1240 mm Height 800 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed
The dimensions of racks for protective sneeze guards	Height 900 mm Width, at least 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	2 pcs
Horizontal lower rack (optional)	Length 1240 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Lviv (address delivery)






JTOT 1.9. Protective transparent sneeze guard (Desktop #9)

Norms and specifications	Essential minimum value
Desktop configuration	Standard
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of sheeting #1	Width 1200 mm Height 800 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed
The dimensions of racks for protective sneeze guards	Height 900 mm Width, at least 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	2 pcs
Horizontal lower rack (optional)	Length 1200 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Poltava (address delivery)



LOT 1.10. Protective transparent sneeze guard (Desktop #10)

Norms and specifications	Essential minimum value
Desktop configuration	Standard
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of sheeting #1	Width 1300 mm Height 800 mm
The dimensions of sheeting #2	Width 650 mm Height 800 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed
The dimensions of racks for protective sneeze guards	Height 900 mm Width, at least 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	3 pcs (if one rack unites 2 sheeting at right angle) OR 4 pcs (if the two sheeting are joined separately)
Horizontal lower rack (optional)	Length 1300 mm Length 650 mm

Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Poltava (address delivery)
	

LOT 1.11. Protective transparent sneeze guard (Desktop #11)

Norms and specifications	Essential minimum value
Desktop configuration	Corner table
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of sheeting #1	Width 1100 mm Height 800 mm
The dimensions of sheeting #2	Width 1050 mm Height 800 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed

The dimensions of racks for protective sneeze guards	Height 900 mm Width, at least 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	3 pcs (if one rack unites 2 sheeting at right angles) OR 4 pcs (if the two sheeting are joined separately)
Horizontal lower rack (optional)	Length 1100 mm Length 1050 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Kharkiv




LOT 1.12. Protective transparent sneeze guard (Desktop #12)

Norms and specifications	Essential minimum value
Desktop configuration	Straight, deep
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA)

	polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of sheeting №1	Width 1100 mm Height 800 mm
The dimensions of sheeting №2	Width 800 mm Height 800 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed
The dimensions of racks for protective sneeze guards	Height 900 mm Width вiд 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	3 pcs (if one rack unites 2 sheeting at right angles) OR 4 pcs (if the two sheeting are joined separately)
Horizontal lower rack (optional)	Length 1100 mm Length 800 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Kharkiv (address delivery)



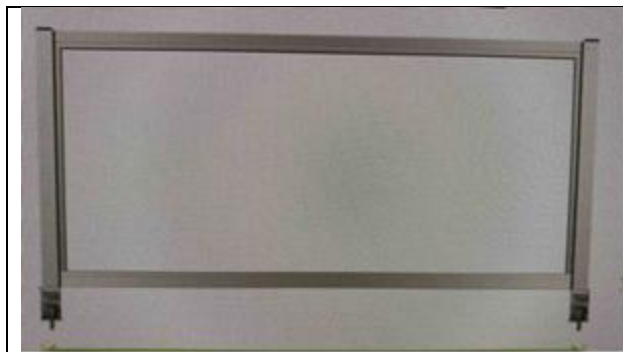

LOT 1.13. Protective transparent sneeze guard (Desktop #13)


Norms and specifications	Essential minimum value
Desktop configuration	Straight, deep
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of sheeting №1	Width 1100 mm Height 800 mm
The dimensions of sheeting №2	Width 800 mm Height 800 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed
The dimensions of racks for protective sneeze guards	Height 900 mm Width від 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	3 pcs (if one rack unites 2 sheeting at right angles) OR 4 pcs (if the two sheeting are joined separately)
Horizontal lower rack (optional)	Length 1100 mm Length 800 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Kharkiv (address delivery)



LOT 1.14. Protective transparent sneeze guard (Desktop #14)

Norms and specifications	Essential minimum value
Desktop configuration	Standard
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of sheeting №1	Width 1400 mm Height 800 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening, installation	On legs (clamping profile type, connector)
The dimensions of racks for protective sneeze guards	Height 800 mm Width, at least 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with legs	2 pcs
Horizontal lower rack (optional)	Length 1400 mm
Space to the lower part of the sheeting (for receiving documents)	NO
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES


Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Kharkiv (address delivery)

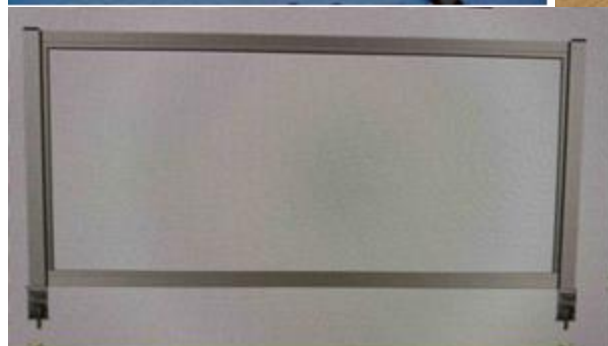

LOT 1.15. Protective transparent sneeze guard (Desktop #15)

Norms and specifications	Essential minimum value
Desktop configuration	Standard
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)

The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of sheeting #1	Width 1750 mm Height 700 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening, installation	On legs (clamping profile type, connector)
The dimensions of racks for protective sneeze guards	Height 700 mm Width, at least 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with legs	2 pcs
Horizontal lower rack (optional)	Length 1750 mm
Space to the lower part of the sheeting (for receiving documents)	NO
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Kharkiv (address delivery)

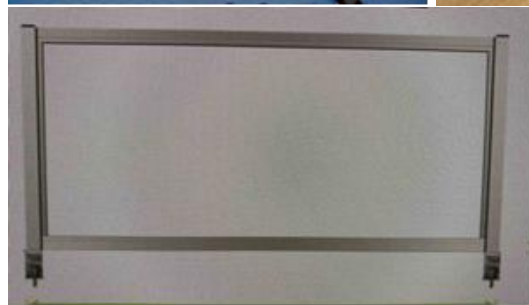



LOT 1.16. Protective transparent sneeze guard (Desktop #16)

Norms and specifications	Essential minimum value
Desktop configuration	Standard
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of sheeting #1	Width 850 mm Height 850 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening, installation	On legs (clamping profile type, connector)
The dimensions of racks for protective sneeze guards	Height 850 mm Width, at least 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with legs	2 pcs
Horizontal lower rack (optional)	Length 850 mm
Space to the lower part of the sheeting (for receiving documents)	NO
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Kharkiv (address delivery)



LOT 1.17. Protective transparent sneeze guard (Desktop #17)

Norms and specifications	Essential minimum value
Desktop configuration	Standard
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of sheeting #1	Width 1700 mm Height 550 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed
The dimensions of racks for protective	Height 650 mm

sneeze guards	Width, at least 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	At least 2 pcs for a desktop
Horizontal lower rack (optional)	Length 1700 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Additionally, port for a camera	Port on the sheeting to install the camera lens The diagonal of the lens: 80 mm Rectangular port: Width 100 mm, Length 150 mm The distance from the right side of the table to the center of the camera 760 mm The distance from the tabletop to the top of the port 570 mm
Additionally, clearance space for the fingerprint device	Additionally increase the clearance between the countertop and the bottom of the protective sheeting, size: Width 200 mm, Height 60 mm. The distance from the lower left edge of the screen to the center of the additional clearance space – 330 mm.
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Dnipro (address delivery)



LOT 1.18. Protective transparent sneeze guard (Desktop #18)

Norms and specifications	Essential minimum value
Desktop configuration	Standard

Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of sheeting #1	Width 1350 mm Height 550 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed
The dimensions of racks for protective sneeze guards	Height 650 mm Width від 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	At least 2 pcs per desktop
Fastening of clamps of racks	Fasteners on both sides of the table
Horizontal lower rack (optional)	Length 1350 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Additionally, port for a camera (<i>by agreement</i>)	Port on the sheeting to install the camera lens The diagonal of the lens: 70 mm Rectangular port: Width 90 mm, Length 150 mm The distance from the left side of the table to the center of the camera 815 mm The distance from the tabletop to the top of the port 455 mm
Additionally, clearance space for the fingerprint device	Additionally increase the clearance between the countertop and the bottom of the protective sheeting, size: Width 200 mm, Height 80 mm. The distance from the lower left edge of the screen to the center of the additional clearance space – 670 mm.
Additionally clearance space for the signature device	Additionally increase the clearance between the countertop and the bottom of the protective sheeting, size: Width 180 mm, Height 50 mm. The distance from the lower left edge of the screen to the center of the additional clearance space – 510 mm.
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Vinnytsia (address delivery)



LOT 1.19. Protective transparent sneeze guard (Desktop #19)

Norms and specifications	Essential minimum value
Desktop configuration	Standard
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of sheeting #1	Width 1370 mm Height 550 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed
The dimensions of racks for protective sneeze guards	Height 650 mm Width від 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	At least 2 pcs per desktop
Fastening of clamps of racks	Fasteners on both sides of the table
Horizontal lower rack (<i>optional</i>)	Length 1370 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Additionally, port for a camera (<i>by</i>	Port on the sheeting to install the camera lens


<i>agreement)</i>	The diagonal of the lens: 80 mm Rectangular port: Width 100 mm, Length 150 mm The distance from the left side of the table to the center of the camera 690 mm The distance from the tabletop to the top of the port 455 mm
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Kyiv (address delivery)



LOT 1.20. Protective transparent sneeze guard (Desktop #20)


Norms and specifications	Essential minimum value
Desktop configuration	Standard
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of sheeting #1	Width 1280 mm Height 550 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed

The dimensions of racks for protective sneeze guards	Height 650 mm Width at least 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	At least 2 pcs per desktop
Fastening of clamps of racks	Fasteners on both sides of the table
Horizontal lower rack (optional)	Length 1280 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Additionally, port for a camera (<i>by agreement</i>)	Port on the sheeting to install the camera lens The diagonal of the lens:80 mm Rectangular port: Width 100 mm, Length 150 mm The distance from the left side of the table to the center of the camera 550 mm The distance from the tabletop to the top of the port 455 mm
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Kyiv (address delivery)

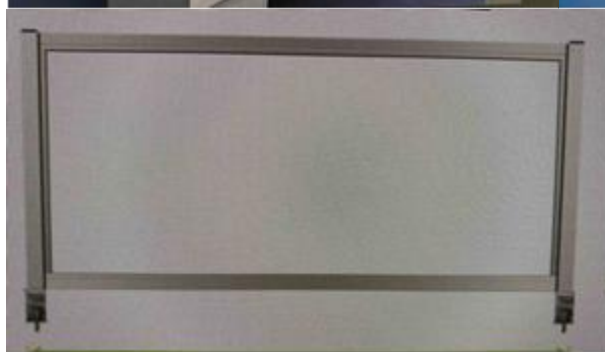

LOT 1.21. Protective transparent sneeze guard (Desktop #21)

Norms and specifications	Essential minimum value
Desktop configuration	Standard
Protective transparent sneeze guard	
Unit of measurement	set

Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of sheeting #1	Width 1450 mm Height 800 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening, installation	On legs (clamping profile type, connector)
The dimensions of racks for protective sneeze guards	Height 900 mm Width від 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with legs	2 pcs
Horizontal lower rack (optional)	Length 1450 mm
Space to the lower part of the sheeting (for receiving documents)	NO
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Kyiv (address delivery)
	



LOT 1.22. Protective transparent sneeze guard (Desktop #22)

Norms and specifications	Essential minimum value
Desktop configuration	Стандартний
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of sheeting #1	Width 1590 mm Height 1000 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed
The dimensions of racks for protective sneeze guards	Height 1100 mm Width від 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	At least 2 pcs for the desktop
Horizontal lower rack (optional)	Length 1590 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES
Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Chernigiv (address delivery)



LOT 1.23. Protective transparent sneeze guard (Desktop #23)

Norms and specifications	Essential minimum value
Desktop configuration	Standard
Protective transparent sneeze guard	
Unit of measurement	set
Quantity	1 set
Material for transparent part	Cast polycarbonate with UV protection or cast acrylic (PMMA polymethyl methacrylate)
The minimum thickness of the transparent part of the sneeze guard	At least 4 mm
Colour	Transparent
The dimensions of sheeting #1	Width 1590 mm Height 1000 mm
Metal construction, framework (stiffening ribs)	Aluminium, or stainless steel, or a chrome-plated pipe with fastening for a sheeting
Fastening to a desktop	Clamp, table top thickness up to 45 mm is allowed
The dimensions of racks for protective sneeze guards	Height 1100 mm Width від 25 mm
Type of racks	The anodized aluminium shape with a sealant for a transparent sheeting, or the chromeplated pipe with fastening for a sheeting with caps from above
Vertical racks with clamps	At least 2 pcs for desktop
Horizontal lower rack (<i>optional</i>)	Length 1590 mm
Space to the lower part of the sheeting (for receiving documents)	100 mm over the tabletop
Possibility of processing by disinfectants	YES
Presence of the scheme of assembly (fastening)	YES

Certificate of Compliance	YES
Warranty	At least 12 months
Additionally	Possibility of additional non-structural modifications of the design with the customer
Address delivery	The city of Chernigiv (address delivery)

